



40 Dale St. West Babylon, NY 11704
 Ph: 631-753-9550 Fx: 631-753-9560
 www.unionconnector.com

Product Bulletin No.: WDF-701

Pin & Sleeve Connectors

Features

- IEC 309 construction and contact configuration
- Available in 60A. or 100A. ampacity rating
- Single or three-phase versions
- Color-coded housing delineates voltage
- Machined brass pins
- Manufactured by Leviton
- Easy wiring and assembly
- Watertight
- UL Listed



60 Amp Pin & Sleeve	
Cat. No.	Description
460P7W	60A., 480V., 2P3W, Male Cable Plug
460C7W	60A., 480V., 2P3W, Female Cable Connector
460B7W	60A., 480V., 2P3W, Male Panel Mount Inlet
460R7W	60A., 480V., 2P3W, Female Panel Mount Receptacle
460P12W	60A., 125/250V., 3P4W, Male Cable Plug
460C12W	60A., 125/250V., 3P4W, Female Cable Connector
460B12W	60A., 125/250V., 3P4W, Male Panel Mount Inlet
460R12W	60A., 125/250V., 3P4W, Female Panel Mount Receptacle
460P9W	60A., 3Ø 250V., 3P4W, Male Cable Plug
460C9W	60A., 3Ø 250V., 3P4W, Female Cable Connector
460B9W	60A., 3Ø 250V., 3P4W, Male Panel Mount Inlet
460R9W	60A., 3Ø 250V., 3P4W, Female Panel Mount Receptacle
560P9W	60A., 3Ø 120/208V., 4P5W, Male Cable Plug
560C9W	60A., 3Ø 120/208V., 4P5W, Female Cable Connector
560B9W	60A., 3Ø 120/208V., 4P5W, Male Panel Mount Inlet
560R9W	60A., 3Ø 120/208V., 4P5W, Female Panel Mount Receptacle
560P7W	60A., 3Ø 277/480V., 4P5W, Male Cable Plug
560C7W	60A., 3Ø 277/480V., 4P5W, Female Cable Connector
560B7W	60A., 3Ø 277/480V., 4P5W, Male Panel Mount Inlet
560R7W	60A., 3Ø 277/480V., 4P5W, Female Panel Mount Receptacle




40 Dale St. West Babylon, NY 11704
 Ph: 631-753-9550 Fx: 631-753-9560
 www.unionconnector.com

Product Bulletin No.: WDF-701

Pin & Sleeve Connectors

100 Amp Pin & Sleeve	
Cat. No.	Description
4100P7W	100A., 480V., 2P3W, Male Cable Plug
4100C7W	100A., 480V., 2P3W, Female Cable Connector
4100B7W	100A., 480V., 2P3W, Male Panel Mount Inlet
4100R7W	100A., 480V., 2P3W, Female Panel Mount Receptacle
4100P12W	100A., 125/250V., 3P4W, Male Cable Plug
4100C12W	100A., 125/250V., 3P4W, Female Cable Connector
4100B12W	100A., 125/250V., 3P4W, Male Panel Mount Inlet
4100R12W	100A., 125/250V., 3P4W, Female Panel Mount Receptacle
4100P9W	100A., 3Ø 250V., 3P4W, Male Cable Plug
4100C9W	100A., 3Ø 250V., 3P4W, Female Cable Connector
4100B9W	100A., 3Ø 250V., 3P4W, Male Panel Mount Inlet
4100R9W	100A., 3Ø 250V., 3P4W, Female Panel Mount Receptacle
5100P9W	100A., 3Ø 120/208V., 4P5W, Male Cable Plug
5100C9W	100A., 3Ø 120/208V., 4P5W, Female Cable Connector
5100B9W	100A., 3Ø 120/208V., 4P5W, Male Panel Mount Inlet
5100R9W	100A., 3Ø 120/208V., 4P5W, Female Panel Mount Receptacle
5100P7W	100A., 3Ø 277/480V., 4P5W, Male Cable Plug
5100C7W	100A., 3Ø 277/480V., 4P5W, Female Cable Connector
5100B7W	100A., 3Ø 277/480V., 4P5W, Male Panel Mount Inlet
5100R7W	100A., 3Ø 277/480V., 4P5W, Female Panel Mount Receptacle

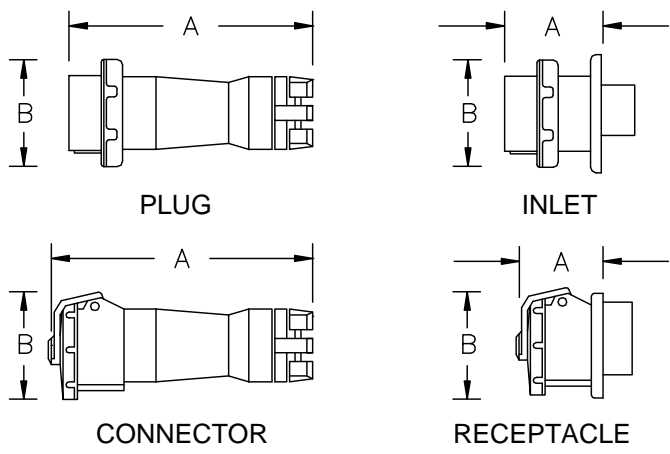

DEVICE	DIMENSIONS	
	A	B
60A. PLUG	10.8"	4.5"
60A. CONNECTOR	11.3"	4.4"
60A. INLET	3.1"	4.5"
60A. REECEPTACLE	3.5"	4.4"
100A. PLUG	12.3"	5.0"
100A. CONNECTOR	12.8"	4.8"
100A. INLET	3.5"	5.0"
100A. REECEPTACLE	3.9"	4.8"