



40 Dale St. West Babylon, NY 11704
 Ph: 631-753-9550 Fx: 631-753-9560
 www.unionconnector.com

Product Bulletin No.: DBF-501A

Studio Portable Distro

DBJ-5001545 (SINGLE PHASE)



Distribution: 60A.
Input: 60A., 120V., 1Ø, 3-Wire
 60A., 2P&G Pin Pigtail
Output: (3) 20A., 120V. Edison Duplex
Feed-Thru: None
Size / Weight: 6"L. x 5"W. x 3" H ; 5 lbs.



DBJ-5001546 (SINGLE PHASE)



Distribution: 60A.
Input: 60A., 120V., 1Ø, 3-Wire
 60A., 2P&G Pin Pigtail
Output: (3) 20A., 120V. Pin
Feed-Thru: None
Size / Weight: 6"L. x 5"W. x 3" H ; 5 lbs.



DBS-4961 LunchBox (SINGLE PHASE)



Distribution: 100A.
Input: 100A., 120V., 1Ø, 3-Wire
 100A., 120V., 2P&G Pin
Output: (5) 20A., 120V. Edison Duplex
Feed-Thru: 100A., 120V., 2P&G Pin
Size / Weight: 10"L. x 6½"W. x 6½"H.; 8 lbs.



DBS-3991 (SINGLE PHASE)



Distribution: 100A.
Input: 100A., 120V., 1Ø, 3-Wire
 100A., 120V., 2P&G Pin
Output: (2) 60A., 120V. Pin
 (1) 20A., 120V. Edison Duplex
Feed-Thru: None
Size / Weight: 10"L. x 6½"W. x 6½"H.; 8 lbs.



CONSTRUCTION SPECIFICATIONS


1. Enclosure shall anodized aluminum.
2. All wiring devices shall be UL Listed, grounding type.
3. All branch circuits shall be provided with a UL Listed branch rated circuit breaker.
4. Each branch circuit shall have a UL Recognized pilot light to indicate current present.
5. When pigtails are provided, cable shall be UL Listed Stage Cable, with a strain relief for attachment to the enclosure.
6. Units shall be UL Listed




40 Dale St. West Babylon, NY 11704
 Ph: 631-753-9550 Fx: 631-753-9560
 www.unionconnector.com


Product Bulletin No.: DBF-501A

Studio Portable Distro


DBS-4633 (THREE PHASE) 


Distribution: 300A.
Input: 100A., 120/208V., 3Ø, 5-Wire
Input Type: (5) #2 Cam Pigtails
Output: (3) 100A., 120V. 2P&G Pin
 (3) 20A.
 Edison Duplex
Feed-Thru: None
Size / Weight: 10"L.x 6½" W.x 6½"H. ; 15 lbs.

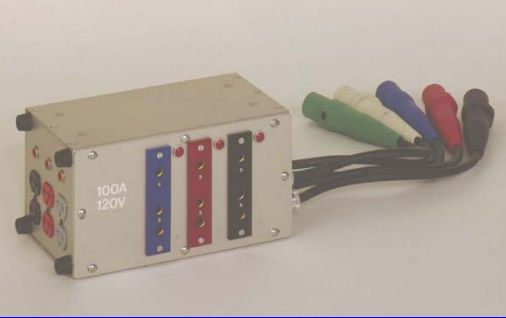


DBT-4681 (THREE PHASE) 

Distribution: 600A.
Input: 200A., 120/208V., 3Ø, 5-Wire
 (5) Cam 2/0 Pigtails
Output: (6) 100A., 120V. 2P&G Pin
 (1) 20A., 120V. Edison Duplex
Feed-Thru: None
Size / Weight: 15"L.x 10"W.x 10"H. ; 33 lbs.



DBT-4671 (THREE PHASE) 

Distribution: 600A.
Input: 400A., 120/208V., 3Ø, 5-Wire
 (5) Panel Mount Cam
Output: (6) 100A., 120V. 2P&G Pin
 (1) 20A., 120V.
 Edison Duplex
Feed-Thru: (5) Panel Mount Cam
Size / Weight: 19"L. x 13"W. x 7"H.; 39lbs.



OPTIONS

Enclosure - All standard DistroBoxes are fabricated from aluminum. Steel or Stainless Steel enclosures available on request.

Finish - Standard finish is anodized aluminum. Other colors and finishes are available on request.

Connectors - The boxes detailed here are standard units. Other connectors available include:

TYPE	Ampacity	Voltage
PIN	60 - 100A.	120V. or 240V.
NEMA Edison	15 - 50A.	125V. 125/250V. 120/208V.
NEMA Locking	15 - 50A.	125V. 125/250V. 120/208V.
Pin & Sleeve	60 - 100A.	120/240V. 120/208V.

Meters - Analog or digital meters can be added to any distros. These can be as simple as iron-vane ammeters or as modern as a panel mounted true RMS digital multimeter.

Wheels - A way to increase portability is with a dolly tray. The dolly is complete with 4" heavy-duty wheels can be fabricated to hold the larger DistroBoxes. An alternate method is to provide casters bolted directly to the bottom of the DistroBox.

FOR INFORMATION AND PRICING OF CUSTOMIZED DISTROS, CONTACT THE FACTORY AT 631-753-9550 ext. 204